

# Установка, регистрация и настройка Win-Test

По мотивам описания  
большого знатока программы

N6TV

13 October 2010

# Установка и регистрация Win-Test

1. Перейдите на сайт <http://www.win-test.com>
  - Оплатите лицензию в разделе **Buy Win-Test**
  - Сохраните данные, полученные по e-mail – ваш номер счета клиента (**customer no.**) и пароль к сайту (**password**)
2. Скачайте файлы Win-Test из закрытого раздела сайта
  - <http://download.win-test.com/v4/bin>
  - Укажите **ПОЗЫВНОЙ** и пароль (**password**)
3. Установите Win-Test и запустите программу
4. В меню выберите **Help, Register Software**
  - Скопируйте уникальный код **Computer Code** в буфер обмена
  - Перейдите по линку **Register now** на сайт
5. Вставьте значение **Computer Code**, отправьте запрос на получение кода регистрации (**Registration key**)
6. Полученный по e-mail **Reg. key** вставьте в Win-Test
7. Повторите шаги 3 - 8 для всех своих компьютеров

# Шаг 1. Купить Win-Test

Collected funds by Win-Test sales are exclusively dedicated to the non-profit association RACK (Radio Amateur Club de Kourou) to help our contest activities, especially the **FY5KE** activation during international contests.

► Online purchase : Fill up and confirm the order form below to securely buy Win-Test with [PayPal](#).


You don't need to have an opened PayPal account to buy with PayPal. If you do not have a PayPal account, PayPal will give you the procedure to open a personal account. Note that this procedure is safe and secured. You will then be able to pay with a - valid - credit card (Visa, Mastercard and Amex are accepted).

**Note:** eCheck clearance by Paypal usually takes 3 or 4 opened days. You will not receive the order confirmation with identifiers to register your Win-Test copy before the end of this period. Credit card buying is straightforward and doesn't involve such a delay.


Callsign [1]:

Email address [2]:

Customer number [3]:



- Win-Test version 4 50€ (Euros)
- Upgrade from version 3 to version 4 20€ (Euros)
- Donation of free amount in Euros [4]



При первоначальной покупке не заполнять поле Customer number [3]

# Шаг 1 (продолжение)


- После оплаты на адрес, указанный в поле [2] придет письмо с темой:

**“Achat de Win-Test - Win-Test purchase”**

- Сохраните пароль **password** и номер счета клиента **customer no.**

**Важно!** Эти данные вы не можете изменить

# E-mail с паролем и customer no.

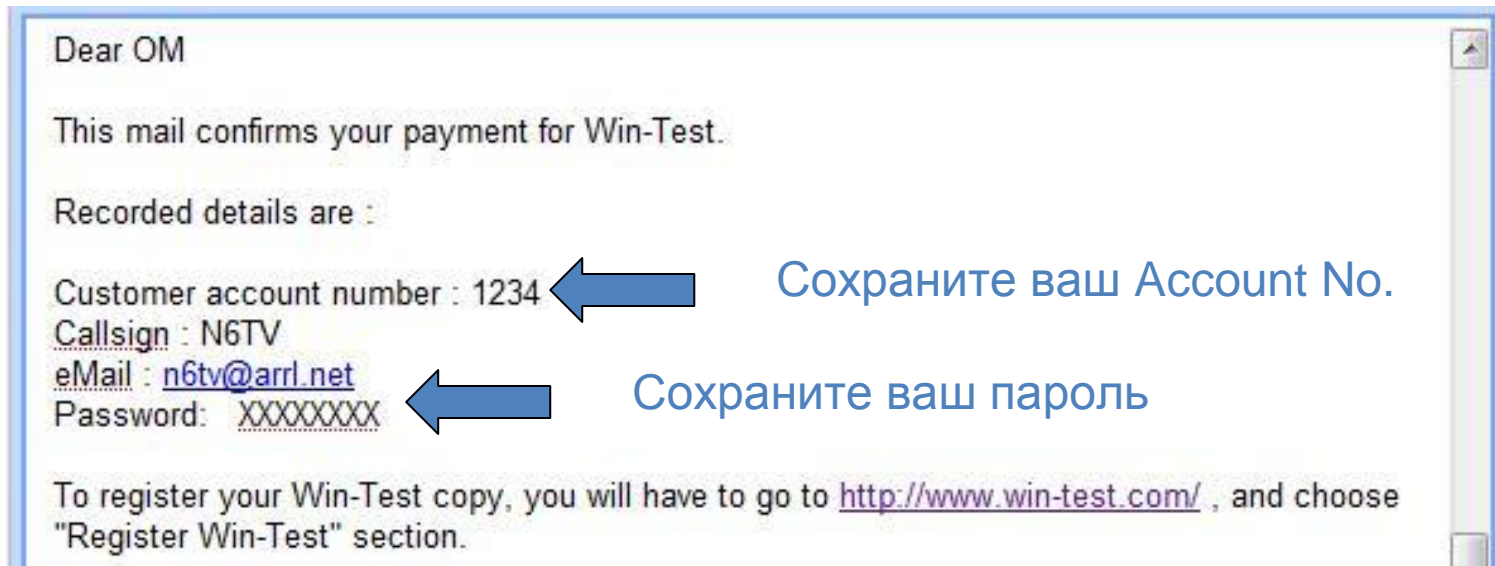

## Шаг 2. Скачайте Win-Test


- Перейдите по адресу  
<http://download.win-test.com/v4/bin>
  - Укажите **ПОЗЫВНОЙ** (*не customer no.*) и **пароль**
- Сохраните файл wt-4.13.0.exe (или более новый, 14 МВ)
- Запустите программу

# Шаг 3. Установка Win-Test

- Установите **WT-4.13.0.EXE** как обычную Windows программу
- Для CW манипуляции через LPT порт необходимо установить **DLPORTIO.SYS**:
  - <http://download.win-test.com/port95nt.exe>
  - Для Windows 7 32-bit
    - В меню правой кнопки мышки Port95nt.exe укажите
      - Свойства, Совместимость, Запустить программу в режиме совместимости с: Windows XP Service Pack 2
      - запуск программы от имени администратора
  - Для Windows 7 64-bit, port95nt.exe не работает, нужна другая версия. Установите InpOut32, затем переименуйте InpOut32.dll в DLPortIO.DLL
- 

<http://www.highrez.co.uk/scripts/download.asp?package=InpOutBinaries>

# Шаг 4. Help, Register Software

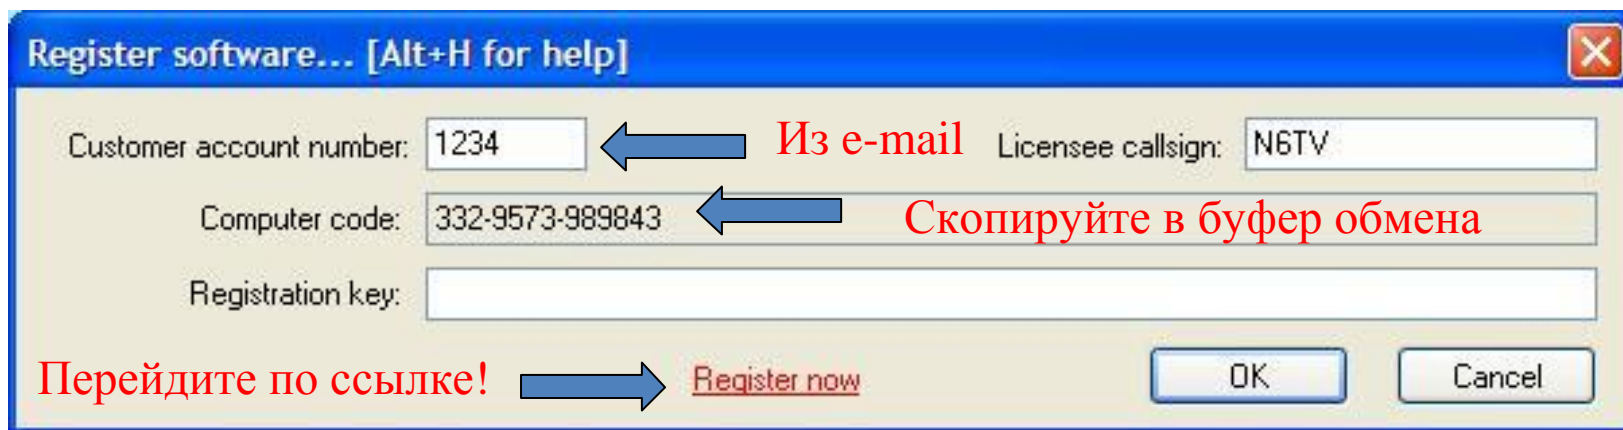

The screenshot shows a dialog box titled "Register software... [Alt+H for help]". It contains three input fields: "Customer account number" with the value "1234", "Licensee callsign" with the value "N6TV", and "Computer code" with the value "332-9573-989843". There is also an empty "Registration key" field. At the bottom, there is a "Register now" button and "OK" and "Cancel" buttons. Red text annotations with blue arrows point to the "Customer account number" field (labeled "Из e-mail"), the "Computer code" field (labeled "Скопируйте в буфер обмена"), and the "Register now" button (labeled "Перейдите по ссылке!").

Программа определяет уникальный код для конкретного компьютера, по нему авторы вычисляют код регистрации и высылают его по e-mail.

**Computer code** уникален для каждого компьютера, зависит от параметров жесткого диска, может еще чего (секрет авторов)



# Шаг 5. Вставьте Computer Code, запросите Registration Key

After receiving the payment confirmation, once the [registrable version](#) installed and working, to get your registration key, you have to fill the fields below, with your **customer account number**, your **callsign** and the **Win-Test computer code** found in the **Win-Test registration dialog** (Help / Register software... menu).

You must enter below the Win-Test computer code "as is" : Only **numbers and dashes**, no space. The easiest way is to copy/paste it from Win-Test (use the right-click), to avoid typing errors.


You will then receive an email, to the address you gave when [ordering](#), including the registration key (needed in this dialog).

(\*) Customer account number :

(\*) Licencee callsign :

(\*) Win-Test computer code :

(\*) Mandatory fields



# Шаг 6. Откройте новое письмо

Тема: Code de validation de Win-Test - [Win-Test registration key](#)

===== English translation ===== English translation =====

Dear OM,

Following your registration key request, please find below needed identifiers to enter in the Help / Register dialog of your Win-Test evaluation copy. Don't forget to restart Win-Test to validate your registration.

Customer number : 1234

Callsign : N6TV

Computer serial number : 332-9573-989843 [You cannot modify this number]

Registration key : 66AFL-6TIZI-4FYQW-1MI4R-1YC82

Копируйте в буфер  
обмена

CAUTION : You must carefully enter the registration key field with data above. We even advise you to copy/paste this key from this email.

# Шаг 6 (продолжение) Вставьте **Registration key** в окно Register software



Register software... [Alt+H for help]

Customer account number: 2115 Licensee callsign: N6TV

Computer code: 332-9573-989843

Registration key: 66AFL-6TIZI-4FYQW-1MI4R-1YC82

Register now OK Cancel

The image shows a screenshot of a software registration dialog box titled "Register software... [Alt+H for help]". The dialog contains several input fields: "Customer account number" with the value "2115", "Licensee callsign" with "N6TV", "Computer code" with "332-9573-989843", and "Registration key" with "66AFL-6TIZI-4FYQW-1MI4R-1YC82". A blue arrow points from the "Registration key" field to the "Register now" button. Another blue arrow points from the "Register now" button to the "OK" button. The "Register now" button is underlined and has a red text color.

**QRV!**

# Настройки Win-Test: разное

Окна с настройками можно вызвать через пункты меню в главном окне программы или вводом специальных текстовых команд в окно для ввода позывного. После установки Win-Test измените параметры:

- Убрать с экрана кнопки (меню Options, Toolbar)
- Автоматически открывать последний лог при запуске программы, Options, Load Contest at Startup, **Enabled**
- Подсказки по пунктам меню, Help, **Display text command tips for menu items**
- Подстановка контрольного номера, Tools, Data Entry, Exchange Guessing, **Automatically**
- Не проверять позывные на корректность по внутреннему набору правил, Tools, Data Entry, Callsign check, **Disabled**

- Свойства band map, измените Spot bandwidth, CW=0
- Выберите файл стран **CTY\_WT\_MOD.DAT**. Options – Data files – Country files или в поле ввода ПОЗЫВНОГО ВВЕСТИ **COUNTRYFILES** [Enter]
  - Кнопка «Download» загрузит и установит свежий файл стран
- Обновить базы позывных
  - Скачать свежий **MASTER.SCP** с сайта <http://www.supercheckpartial.com/>
  - Скопировать его в папку **/databases**  
Windows XP: C:\Documents and Settings\All Users\Application Data\Win-Test\databases\  
Windows 7: C:\ProgramData\Win-Test\databases\
- В поле ввода ПОЗЫВНОГО ВВЕСТИ **MSGs** [Enter]
  - Настроить CW/RTTY сообщения

# Настройки Win-Test

- Contest Configuration – параметры соревнования
- Interface Configuration – трансиверы, сеть
- DX Cluster Configuration (wtDxTelnet) -- споты
- Setting up CW / RTTY Messages -- сообщения
- Voice Keyer Setup – помощник в телефоне
- Remapping the keyboard – переназначить клавиши

# Contest Configuration

Клик по [?] подскажет, что надо вводить в поле Exchange

Кнопками **Save** и **Load** сохраните часто используемые адреса


Выберите Contest

The screenshot shows the 'Contest configuration' dialog box with the following fields and sections:

- Station**
  - Callsign: N6TV
  - Grid Square: CM97CF
  - Exchange (zone, ...): 3
  - DXCC Prefix: W
  - WAZ zone: 03
  - ITU zone: 06
  - State/Province: CA
  - Name: Robert A. Wilson
  - Address: 51 Cheltenham Way
  - Address: San Jose, CA 95139-1257
  - Address: USA
  - Club: Northern California Contest Club
- Load**
  - Buttons: N6TV, Station 2, Station 3, Station 4, Station 5
- Save as**
  - Buttons: N6TV, Station 2, Station 3, Station 4, Station 5
- Contest**
  - Contest: CQWW DX
  - Days...:  This month only
  - Category: Single operator
  - Mode: CW
  - Overlay: ---
  - Band plan: Default
  - Class: High power
  - Power: 1500
  - Operators: (empty field)
- Network**
  - Station: Shack
  - Enable time distribution across the network

Annotations: Blue arrows point to the '?' icon in the Exchange field, the 'Save as' buttons, and the 'Contest' dropdown menu.


# Interface Configuration

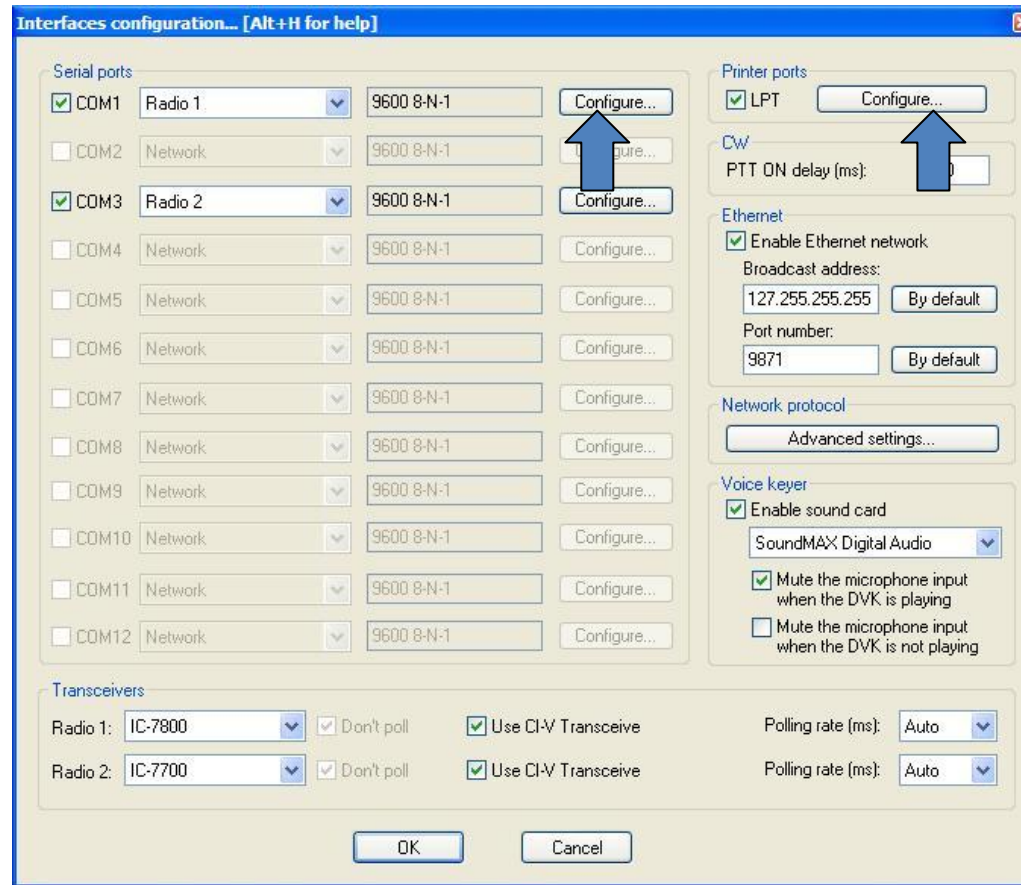

Команда SETUP или пункт меню Options – Configure interfaces




# COM port Configuration

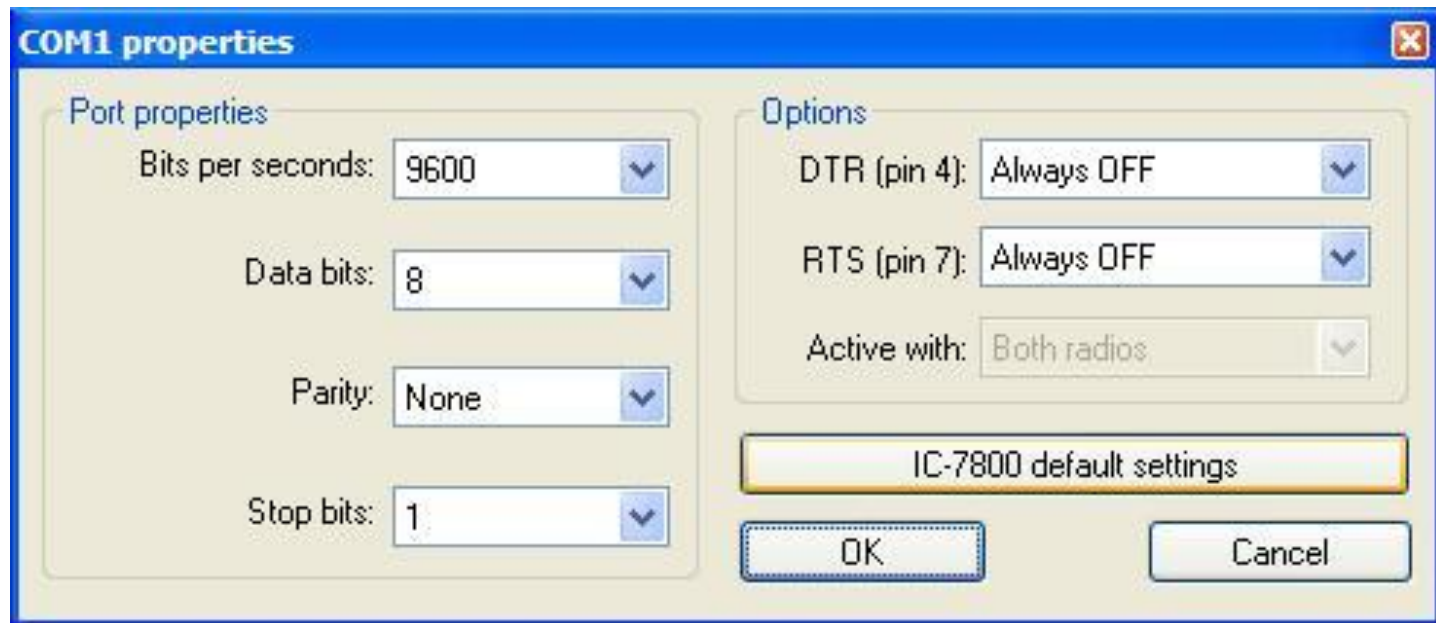

The image shows a screenshot of the 'COM1 properties' dialog box. The dialog is divided into two main sections: 'Port properties' and 'Options'. The 'Port properties' section includes settings for 'Bits per seconds' (9600), 'Data bits' (8), 'Parity' (None), and 'Stop bits' (1). The 'Options' section includes settings for 'DTR (pin 4)' (Always OFF), 'RTS (pin 7)' (Always OFF), and 'Active with' (Both radios). A yellow button labeled 'IC-7800 default settings' is located below the 'Options' section. At the bottom of the dialog are 'OK' and 'Cancel' buttons. A blue arrow points to the 'IC-7800 default settings' button from the right, and another blue arrow points to the 'OK' button from the bottom.

Section	Property	Value
Port properties	Bits per seconds	9600
	Data bits	8
	Parity	None
	Stop bits	1
Options	DTR (pin 4)	Always OFF
	RTS (pin 7)	Always OFF
	Active with	Both radios
Default settings button		IC-7800 default settings

# Printer Port (LPT) Configuration

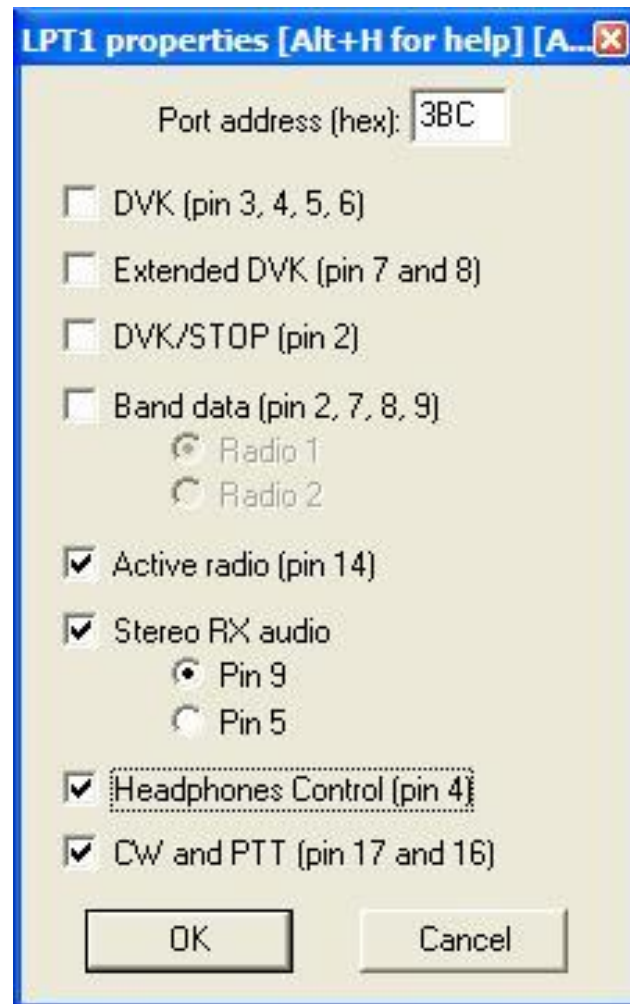


# DX Cluster Configuration


- Запустите отдельный модуль **wtDxTelnet**.
  - В меню WT: Options, DX cluster, Local wtDxTelnet, **Start/stop automatically**
- Этот модуль можно запустить на любом другом компьютере в локальной сети
- Если компьютеров с WT несколько, то надо запустить **ТОЛЬКО ОДИН** модуль **wtDxTelnet** в локальной сети
- В настройках укажите одинаковые Ethernet **broadcast address & port no.** как и в Win-Test
- Выберите DX Cluster node
- Споты будут распространяться на все компьютеры локальной сети WT

# В модуле wtDxTelnet:

- В меню **Options**, **Win-Test Network Properties**
- укажите данные как в Win-Test

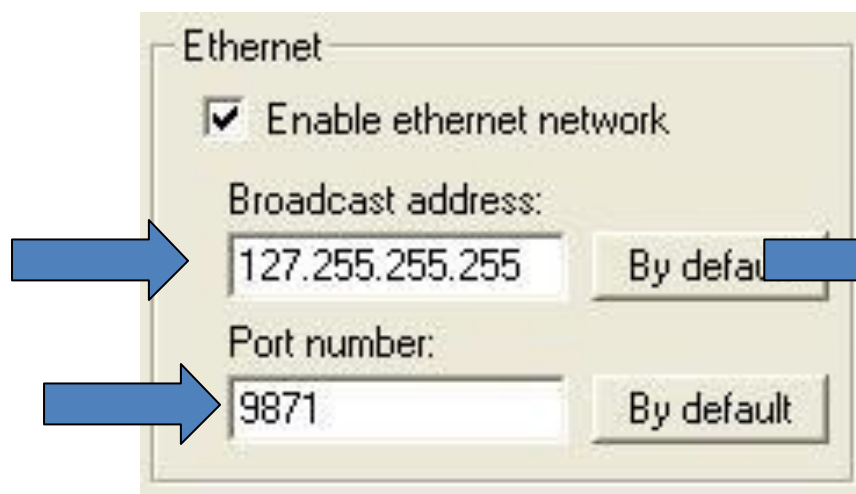


Win-Test  
Interfaces Configuration

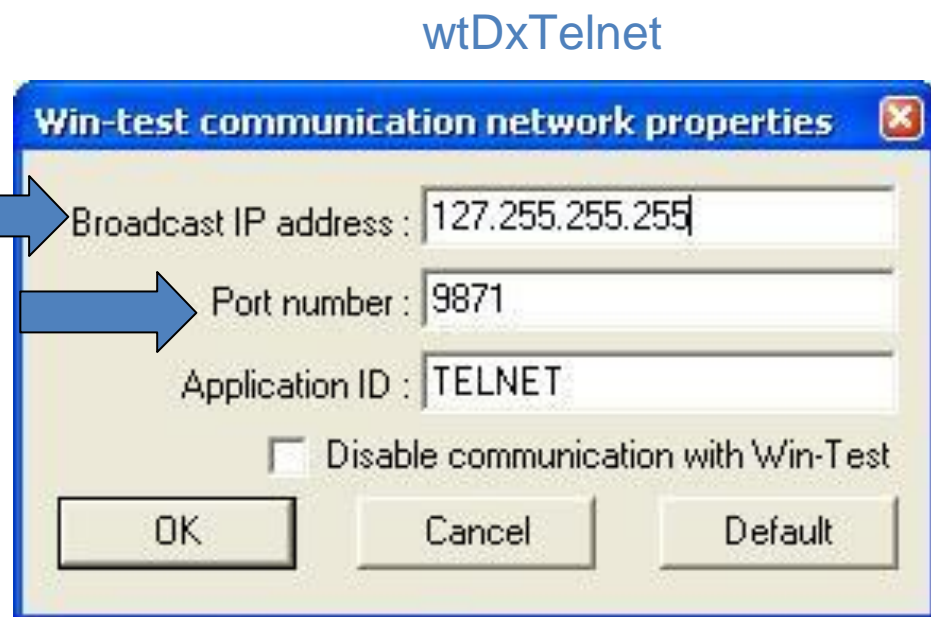

# В модуле wtDxTelnet:

- В меню **Options, DXCluster properties**

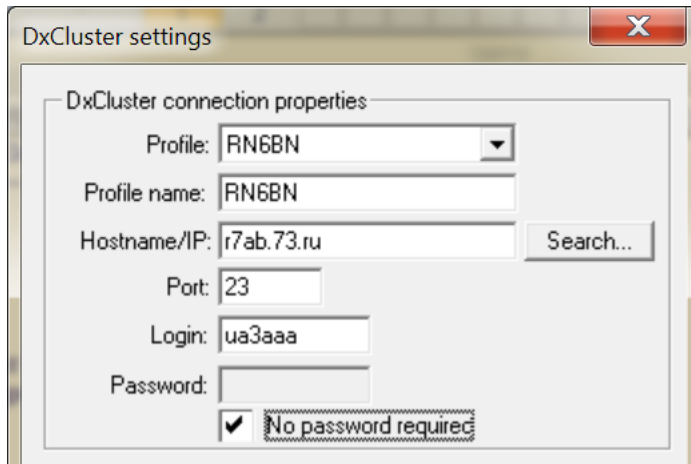

DxCluster settings

DxCluster connection properties

Profile: RN6BN

Profile name: RN6BN

Hostname/IP: r7ab.73.ru Search...

Port: 23

Login: ua3aaa

Password:

No password required



General options

Commands to send when connection is established:

set dx filter not skindupe

Autoconnect at startup

Try to restore connection automatically

Cw Skimmer

Send Frequency for: None

Station Name: STN1

OK Cancel

# CW / RTTY Messages

Standard CW messages configuration... [Alt+H for help]


Messages Options

	Run Messages	Search & Pounce Messages
F1	CQ \$MYCALL \$MYCALL	\$LOGGEDCALL DE \$MYCALL
F2	\$RST^\$ZONE	\$RST\$ZONE
F3	TU	TU \$MYCALL
F4	\$MYCALL	\$MYCALL
F5	\$LOGGEDCALL	\$LOGGEDCALL
F6	CL?	CL?
F7	?	?
INSERT	\$LOGGEDCALL \$QSOB4 \$GUESSEXCH \$F2	R UR \$F2
PLUS	\$CORRECT TU \$MYCALL \$CR \$REPEAT	TU \$CR

OK Cancel

Команда: **MSG** [Enter]

# Messages Options

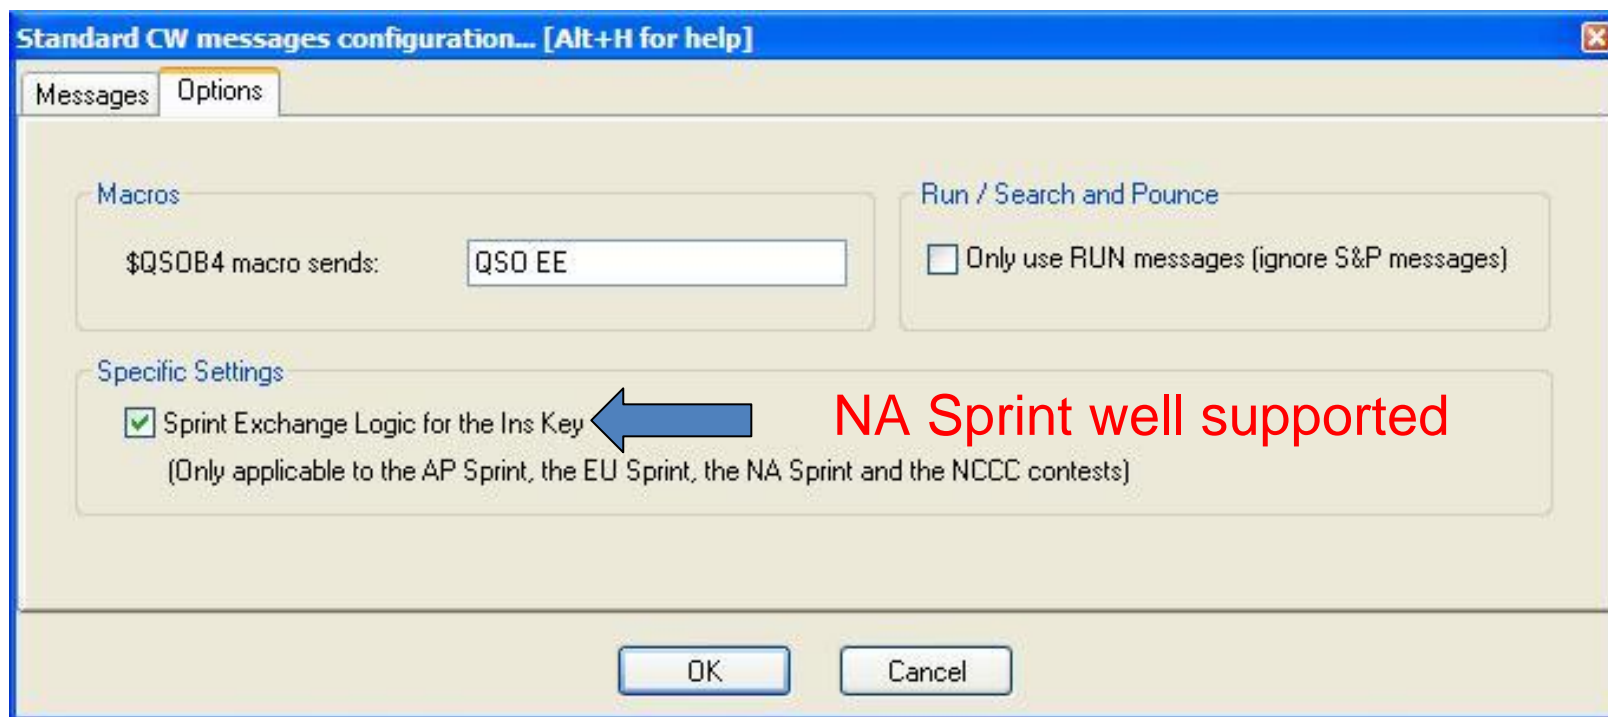

Какая-то уникальная логика для Sprint-подобных контестов

# Voice Keyer Setup Options

- Внешний DVK via LPT или microHAM
- DVK через звуковую карту компьютера
- DVR трансивера via N6TV's scripts (см. **Readme.txt** внутри этих Zip файлов):
  - <http://bit.ly/wtscripts>
    - K3scripts.zip
    - FT1000scripts.zip
    - FT2000scripts.zip



# Remapping the keyboard

Переназначение команд с одних клавиш на другие, более привычные

Меню Tools, [Redefine keyboard keys](#) или

Текстовая команда [DEFINEKEYS](#)

